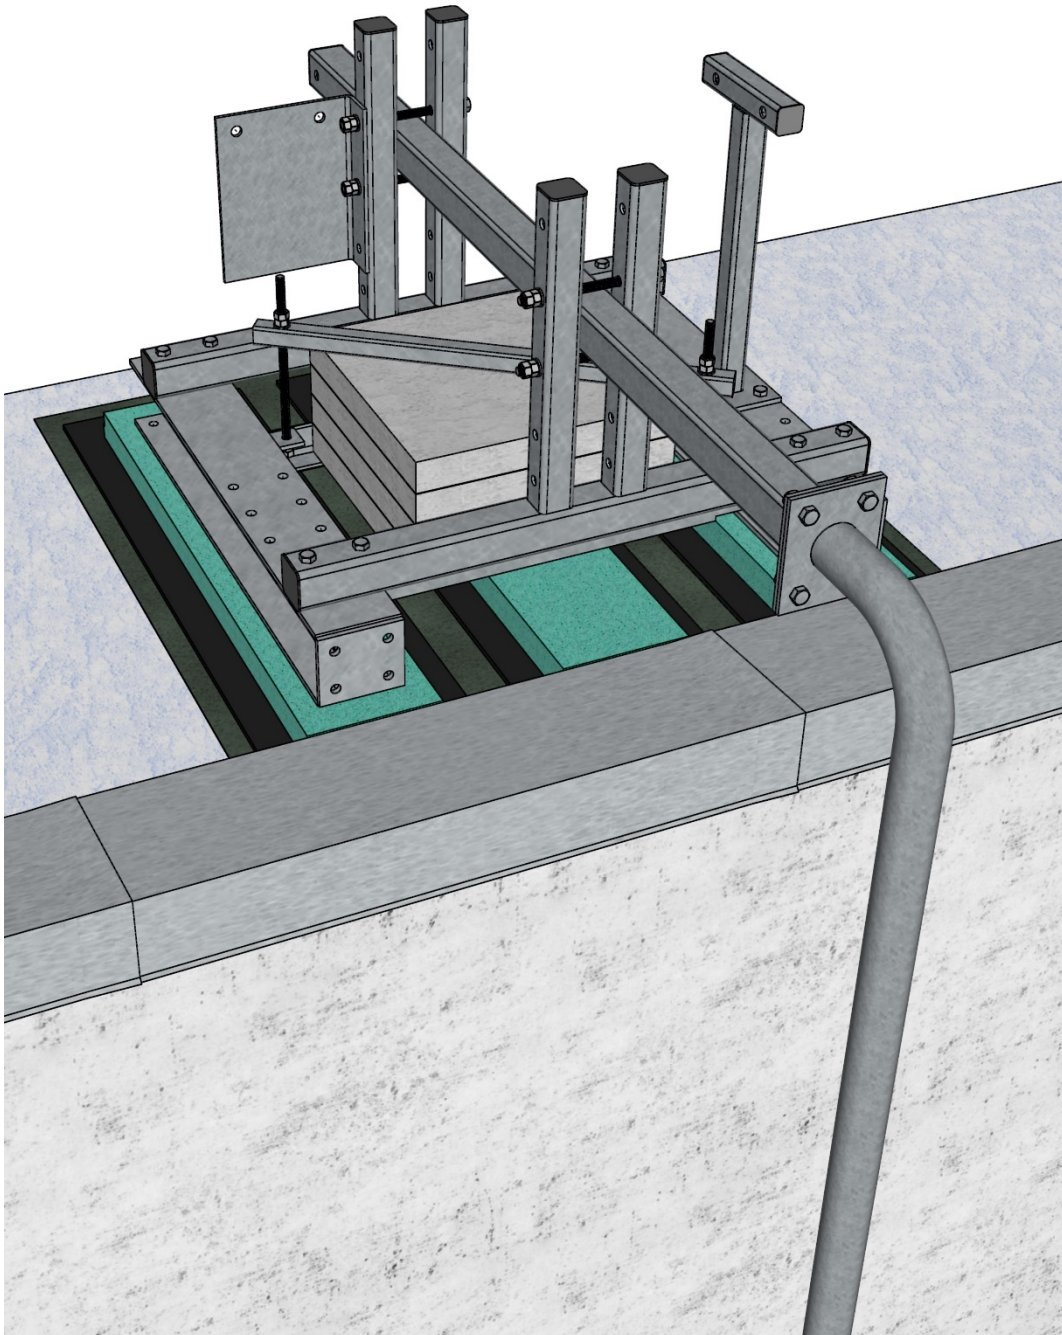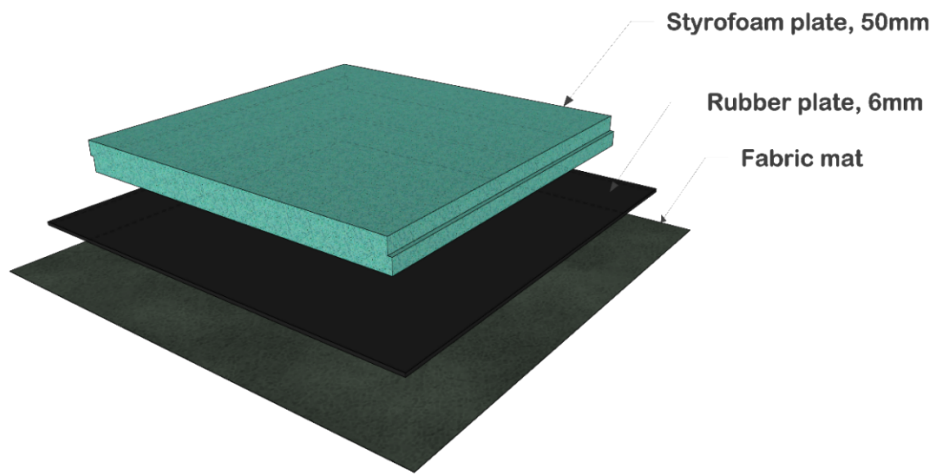# GR 116-01
ANTENNEFESTE OVER TAKKANT - 1 STK. ANTENNERØR, BØYD - 0,8M RAMME
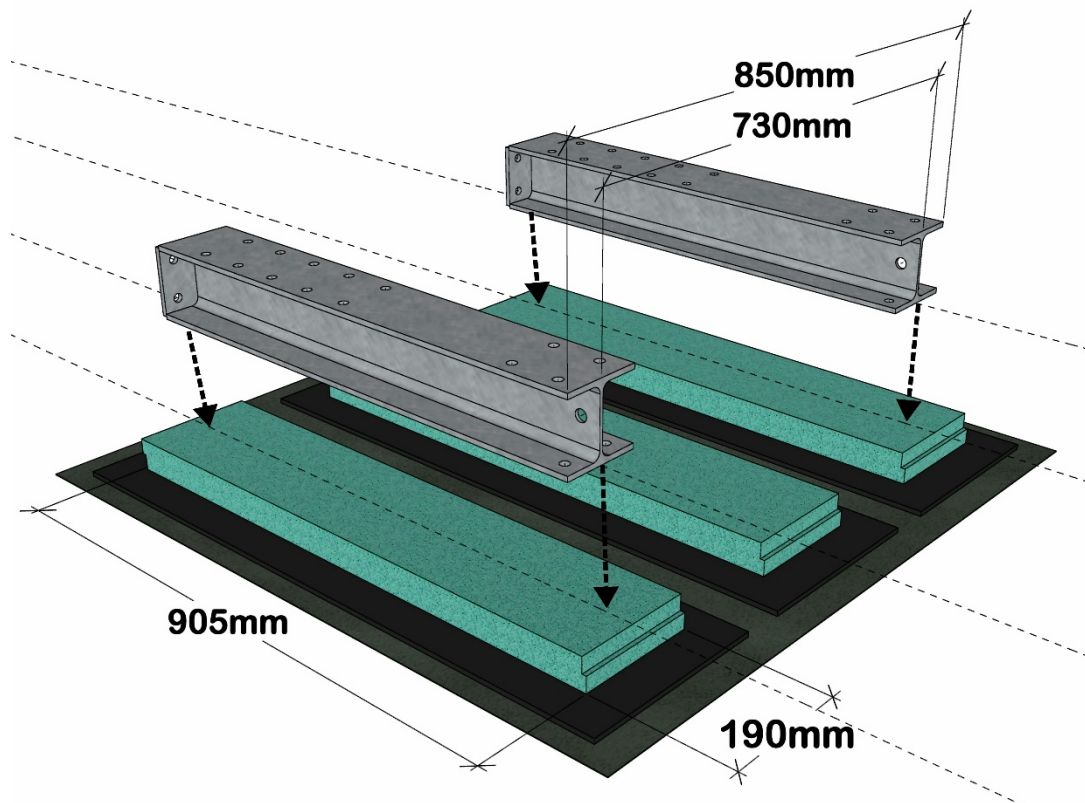
OVERVIEW

GRIP*tel*

1. PREPARE FLORING

> ℹ️ *Protect the surface from the damaging using Styrofoam plate, rubber surface and fabric mat below each supporting plate*

Styrofoam plate, 50mm

Rubber plate, 6mm

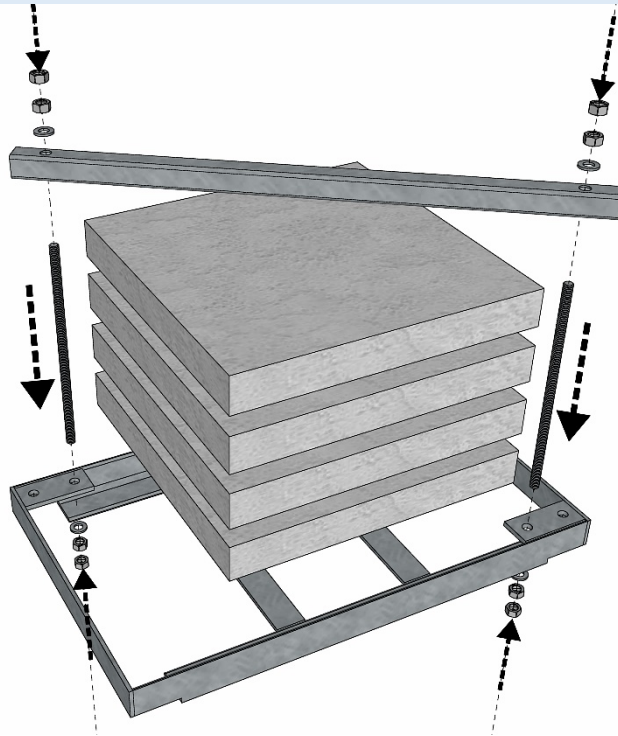Fabric mat

2. SUPPORTING HORIZONTAL BEAM

> ℹ️ *Install 2x horizontal beam **GR120-10-P01** on the prepared floor pads*
> *Set two beams at a distance of 730mm (Axial distance)*
>
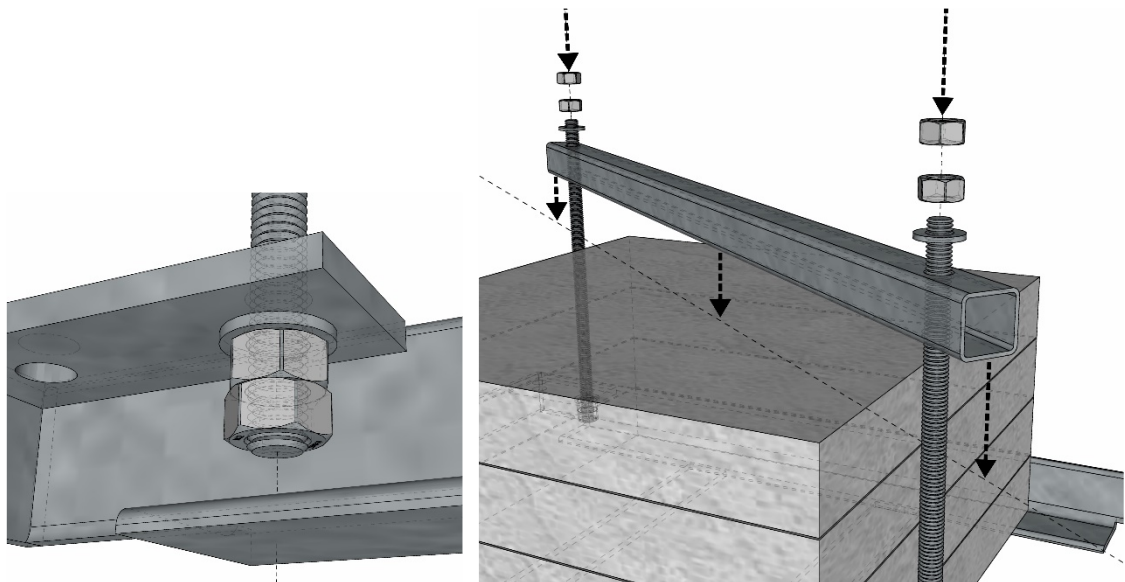> *Recommended to cut 3x Styrofoam pads to dimensions 905/190/50mm*

850mm

730mm

905mm

190mm

GRIPtel

3. Kassett for feste av betongbl.; GR120-11-P18

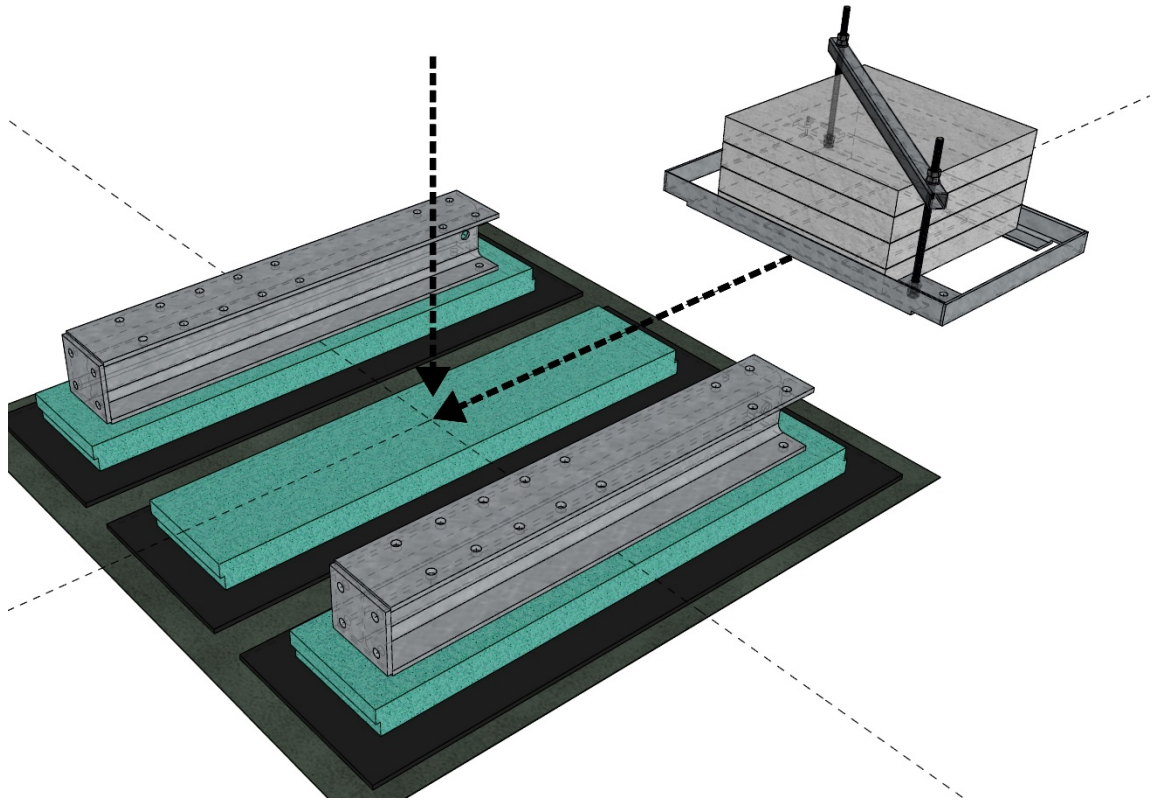> ℹ️ *Set 4x concrete blocks 500/250/50mm at center of the base frame*

> ℹ️ *place two threaded rods diagonally in the required positions (see drawing) and tighten the nuts / counter nuts;*
> *Set tightening HUP30/30/3 over the concrete block and through the installed threaded rods to secure blocks from damaging.*
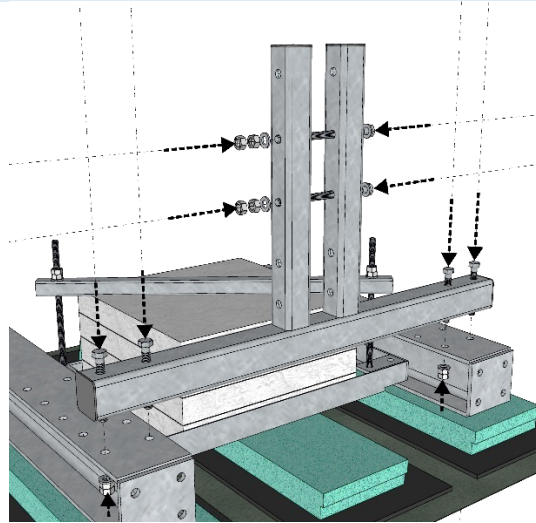
4. VERTICAL SUPPORTS

> ℹ️ *Slide **GR120-11-P18** frame with concrete blocks to the center point between two main horizontal beams **GR120-10-P01***
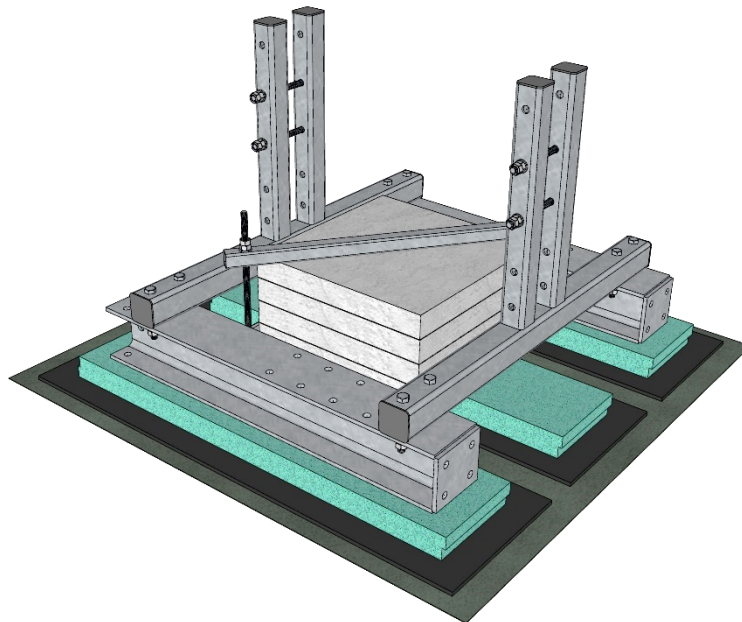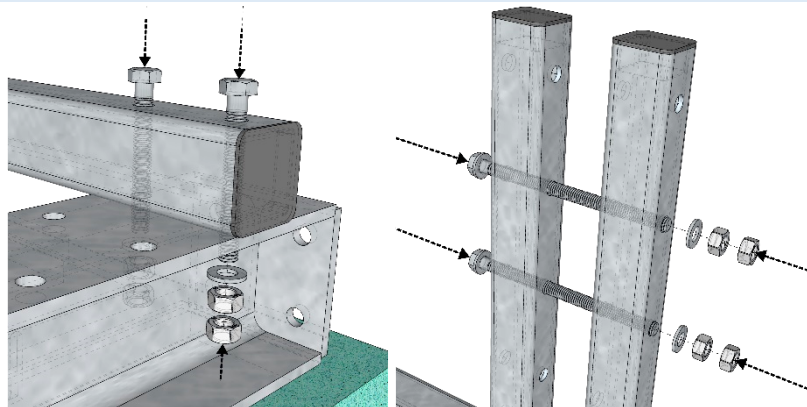
5. EQUIPMENT FRAME

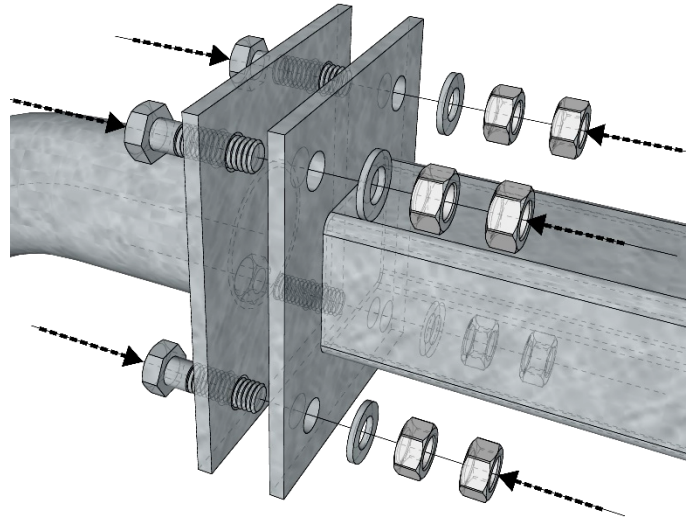> **i** *Install 2x **GR120-13-P30** supports on the prepared beams*

> **i** *Make connection between 2x main beams and 2x **GR120-13-P30** supports using M12x40 bolts*
>
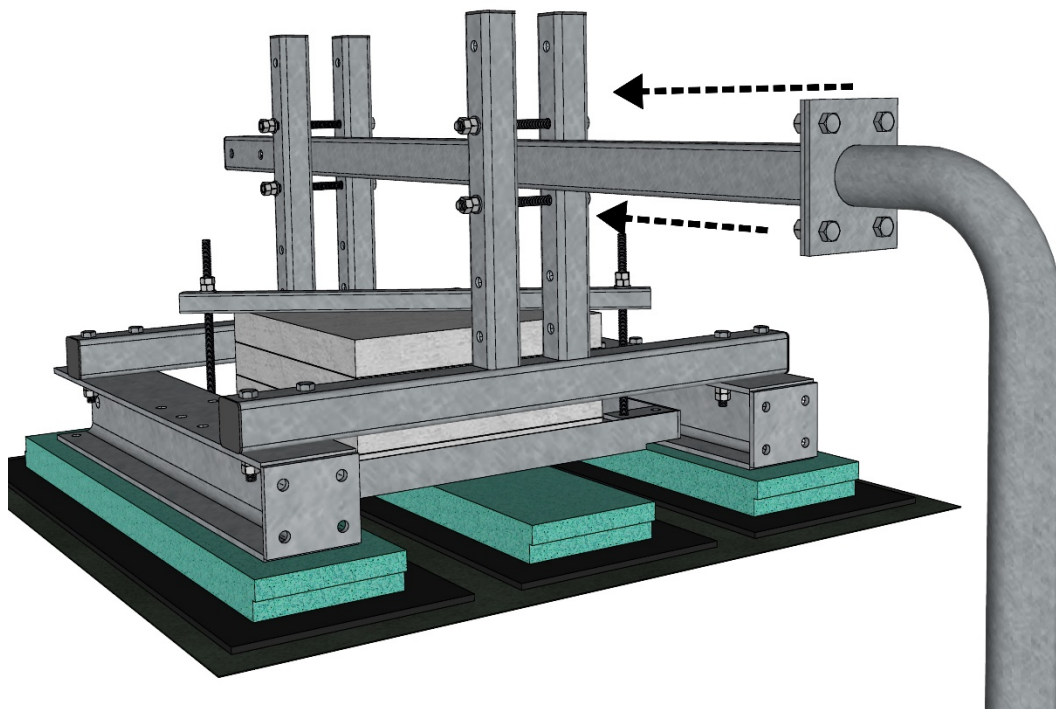> *Prepare adding antenna support set by installing 4x M12x200 bolts/ 2x per support*

GRIPtel

6. ANTENNA SUPPORT SET

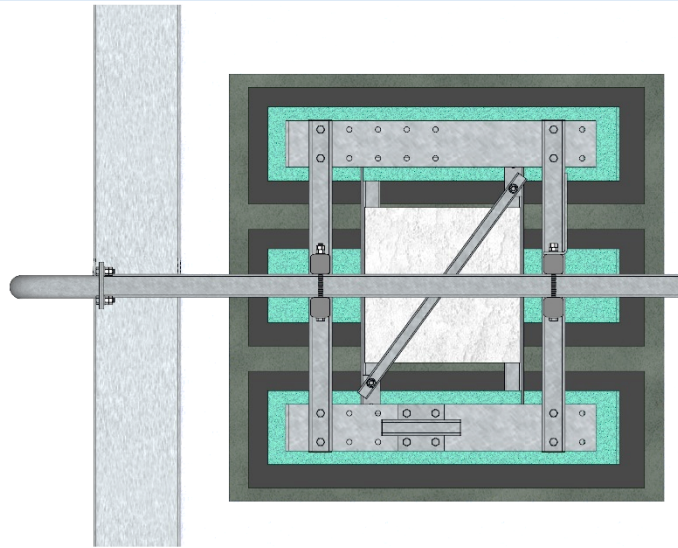> ℹ️ *Connect **GR120-13-P34** bended tube with **GR120-13-P30** supports using 4x M12x40 bolts*

> ℹ️ *Insert antenna support set through the 2x prepared **GR120-13-P30** supports and make curtain tightening of prepared bolts 4x M12x200*
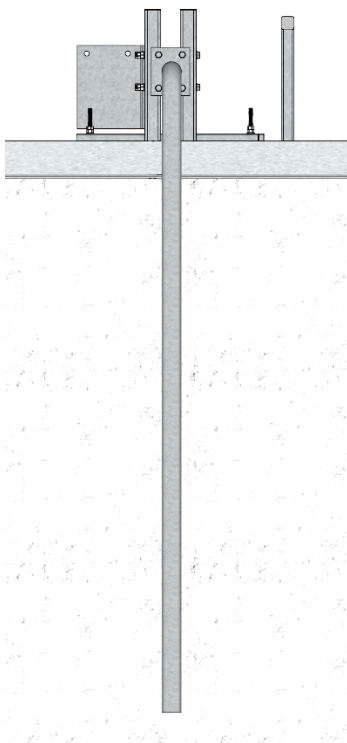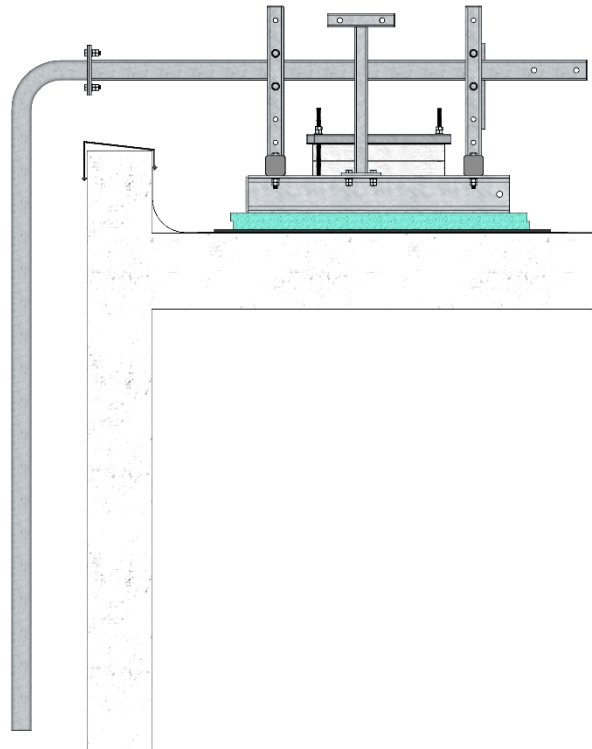

GRIPtel

7. LAYOUT DRAWING

> ℹ️ *Top view*

> ℹ️ *Front view*

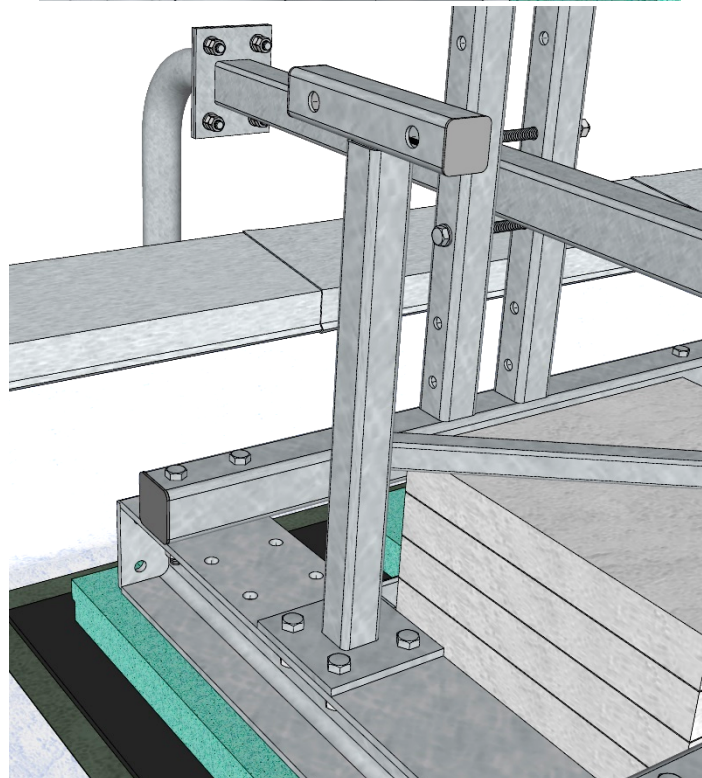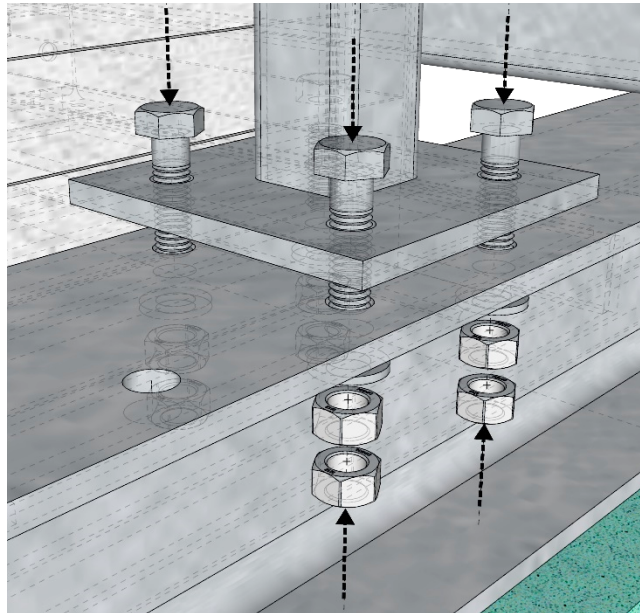> ℹ️ *Side view*

8. RRU SUPPORT GR120-13-P35 - OPTIONAL

> ℹ️ *Install RRU-support **GR120-13-P35** on the side of the GR116-01 support using 4x M12x40*
>
> *Note: order separately*

9. RRU SUPPORT GR120-13-P33 - OPTIONAL

> ℹ️ *Install RRU-support **GR120-13-P33** on the side of the frontal **GR120-13-P30** brackets*
>
> *Note: order separately*